



MEET monitors can receive calls from both the access point to the block corresponding to the home, as well as from any general entrance.


During the call it is possible to open the access door, as well as any other additional doors that may have been installed (gate, garage, etc.) up to a maximum of 4.


It is also possible to view the caller from the camera installed on the building's access panel, as well as from any additional cameras that may have been installed (up to a maximum of 4).


In both cases, the operation is the same: The monitor sounds, the screen turns on automatically and the visitor's image appears, along with the user controls described below.

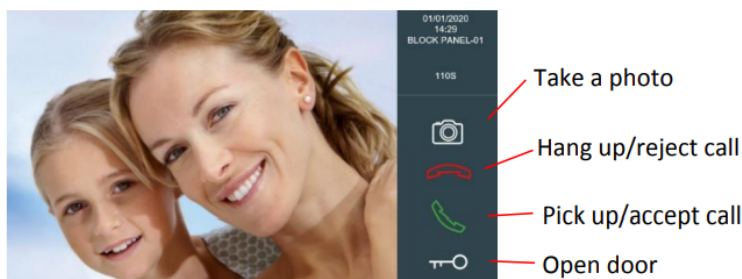



 Take a photo

By touching the icon , the image presented on the monitor will be captured and can be viewed later. See "Call log" section.

 Hang up/reject call

Touch the icon  if you do not wish to take the call. The monitor will turn off

 Open the door

Touch the icon  if you want to open the door without first talking to the caller.

If there are additional doors (other than the main door), touching this icon will display more options at the bottom of the screen. Click on the one corresponding to the door to be opened.

## Call Log



Each time a call is received, the information about the call is recorded, including date and time received, whether the call was answered, origin of the call and a capture (photo) of the time of the call, if the call was made from an outdoor panel, or photos added manually during the call. You can export photos to external support (computer, hard disk, etc.). View NOTES.



Touch the icon to access the record of these calls.

The screenshot shows a 'CALL LOG' screen with a table of call records. A dark overlay on the right side contains several action icons: 'EXPORT PIC.', a trash can, left and right arrows, and a back arrow. Blue arrows point from text labels to specific elements in the screenshot.

Date/Time	Call Status	Origin	Photo Access
15/01/2020 12:05	Incoming	APT.-0010002	
15/01/2020 11:55	Incoming	CONCIERGE-9901	
15/01/2020 11:55	Incoming	CONCIERGE-9901	
15/01/2020 11:48	Missed	CONCIERGE-9901	
15/01/2020 11:44	Missed	CONCIERGE-9901	
15/01/2020 11:44	Incoming	CONCIERGE-9901	
15/01/2020 11:43	Missed	CONCIERGE-9901	
15/01/2020 11:43	Incoming	CONCIERGE-9901	
15/01/2020 11:37	Incoming	BLOCK PANEL-02	Photo access

Annotations:

- Missed call (points to 'x' icon)
- Outgoing call (points to right arrow icon)
- Incoming call (points to left arrow icon)
- Photo access (points to camera icon)

Overlay actions:

- EXPORT PIC. (Export photos to SD)
- Trash can (Delete photos)
- Left/Right arrows (Next or previous page)
- Back arrow (Back)



Touch the icon to delete all records. The device will ask for confirmation.



Touch the icon to display the photo or photos associated with the corresponding record.




## Message Management





The manager or administrator of your community can send text messages to the monitors, individually, in groups or to all the monitors at once.

These messages are recorded on the receiving monitor(s), along with information about the date and time received.

In the event that your MEET monitor has received a message, the Message Indicator will be on.


Touch the icon  to display the received message(s).

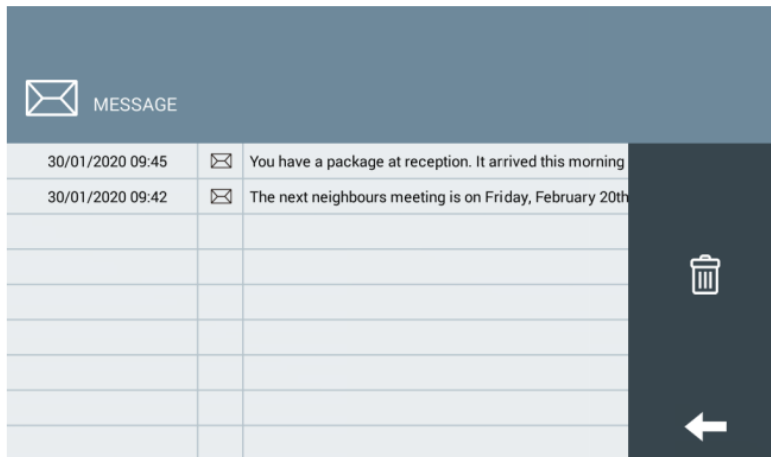

Touch the icon  to delete all messages. The device will ask for confirmation.

Unread messages will show a closed envelope icon and read messages will show an open envelope icon.


Touch the message line to read the entire message

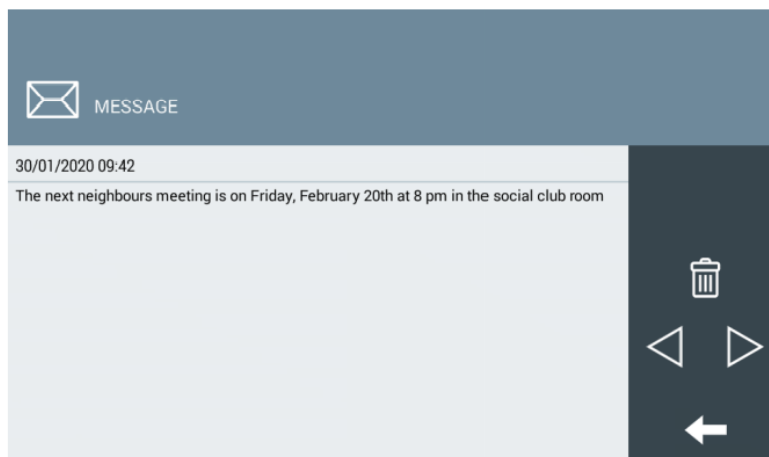

Touch the icon  to delete this message. The device will ask for confirmation.


# SETTINGS

It is possible to customize the MEET monitor to suit your personal taste and to set the basic parameters through this section.

You can access the SETTINGS menu by touching the icon  from the main screen.




A new menu will appear, with these options available:

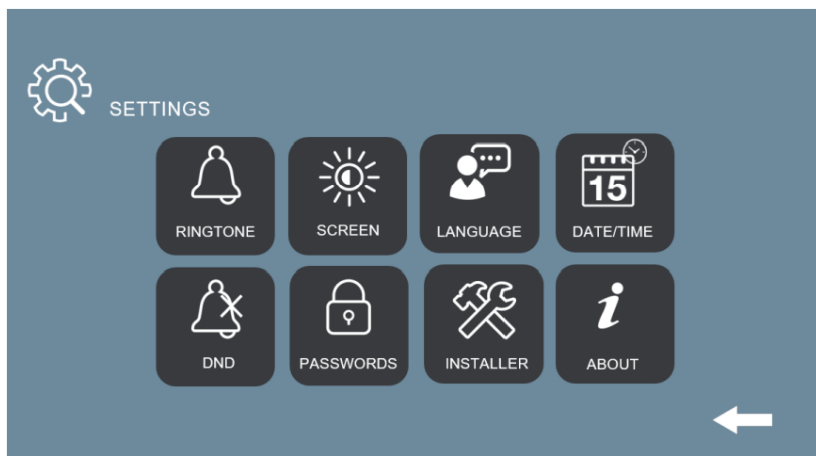


## Ringtone Settings



The MEET monitors have different ring tones you can associate with the different types of calls: PANEL/BLOCK, CONCIERGE and OTHERS.

Touch the icon  to access the different ring tones.

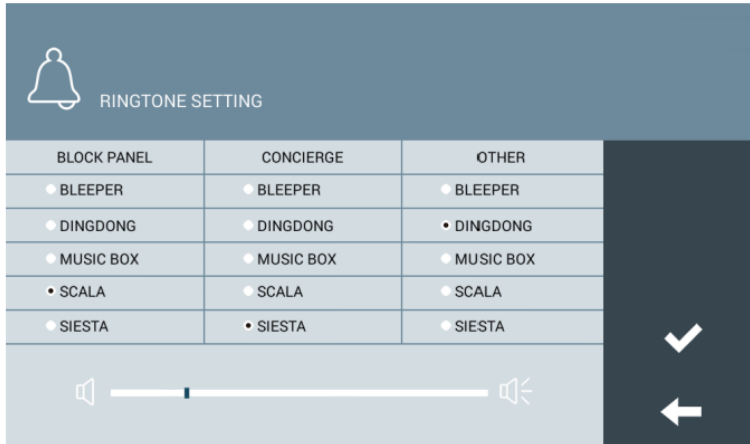


Select the ring tone to be associated with each type of call. After confirmation, the chosen ring tone will be heard.


You can use the lower cursor to adjust the volume of the monitor, both for the ring tones and for hands-free conversation with your callers.

## Screen Settings



It is possible to change the colour of the screen background, to adapt it to your personal taste.

Tap the icon  to access the different options.

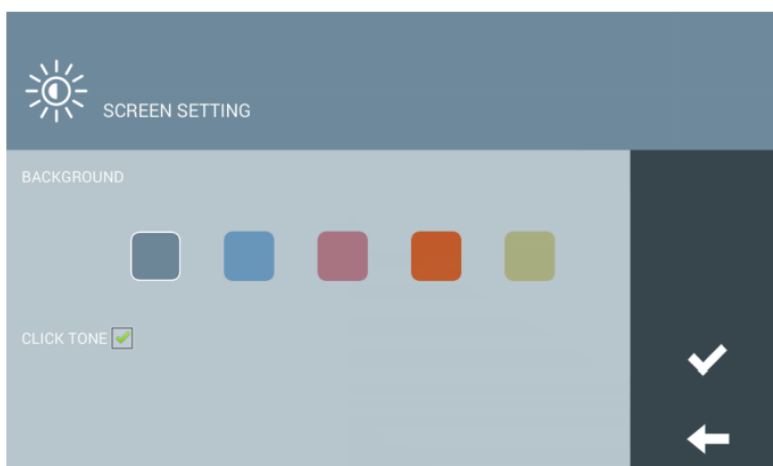


Touch the desired icon to change the wallpaper colour and confirm.


Select the KEY CLICK check box if you want a confirmation sound to be heard when an icon is tapped.

## Language Settings



It is possible to set the language in which the interface of the MEET monitor menus and messages is displayed.

Tap the icon  to select the desired language from the available options: ENGLISH, SPANISH, GERMAN, POLISH, FRENCH, CHINESE, RUSSIAN, TURKISH or FARSI.

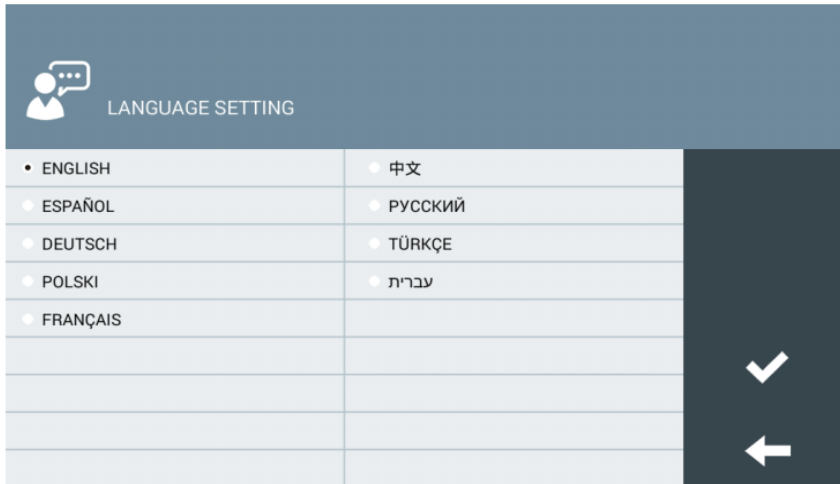


Tap to select the desired language and confirm


## Do Not Disturb Function



You can silence the ring tone of your MEET monitor so that you are not disturbed for a certain period of time.

Incoming calls will turn on the screen, but will not sound the ring tone.

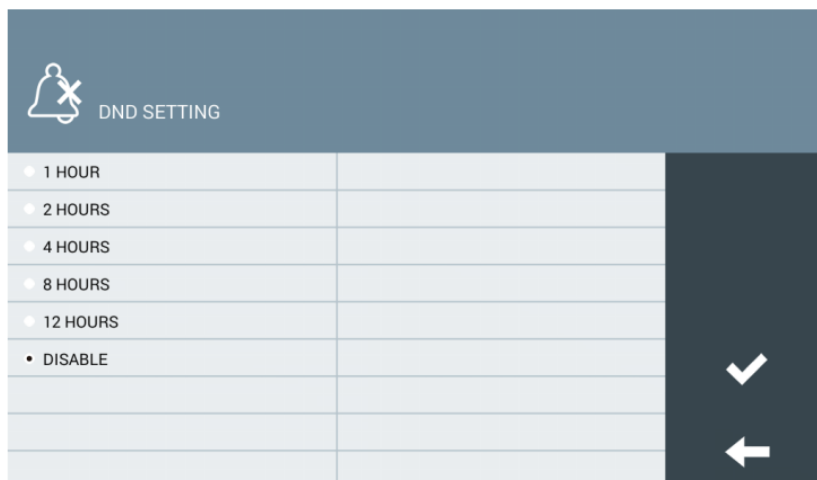

Touch the icon  to activate the Do Not Disturb option and set the required time between 1, 2, 4, 8 or 12 hours, or to deactivate it before the programmed time has elapsed.

In case several monitors on the same apartment/home, this setting will affect only to the monitor that has activated this Do Not Disturb mode.